




PCISA-6770E2

*PCISA Intel® Pentium® M / Celeron® M 400MHz FSB
CPU Card with LCD/CRT, Dual LAN, and Dual Display,
USB2.0 and Audio*

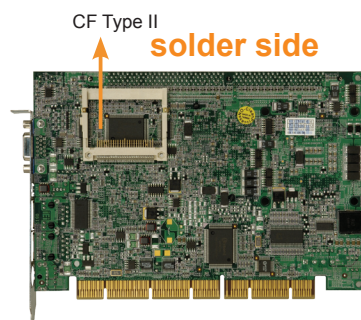

ULV Intel® Celeron M
600MHz 512K Cache/
1GHz Zero Cache

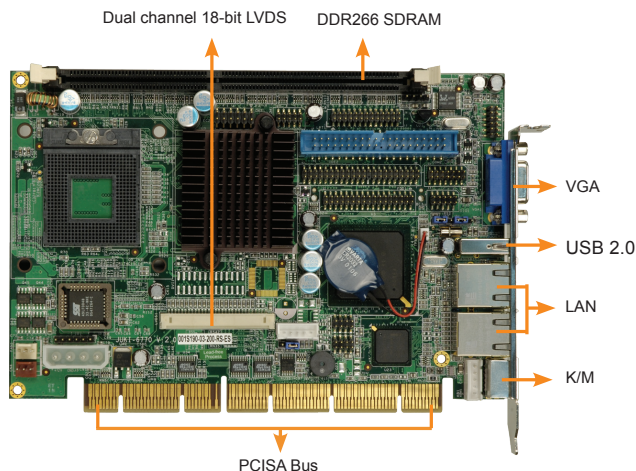

Specifications

- ◆ **CPU**
Socket-479 Intel® Pentium® M, Celeron® M (Banias core) with 400MHz FSB
On-board Celeron® M 600MHz 512K Cache/1.0GHz Zero Cache
- ◆ **System Chipset**
Intel® 852GM + ICH4
- ◆ **BIOS**
AMI BIOS
- ◆ **System Memory**
1 x 184-pin DDR 266MHz up to 1GB
- ◆ **Ethernet**
Dual 10/100Mbps Intel® 82562ET/82551ER Ethernet chipsets
- ◆ **I/O Interface**
1 x RS-232
1 x RS-232/422/485
1 x LPT
1 x IrDA
5 x USB 2.0
1 x FDD
2 x IDE
1 x PS/2 for KB/MS
- ◆ **Digital I/O**
8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ **Super I/O**
W83627HG
- ◆ **Audio**
Realtek ALC655 with AC'97 codec
- ◆ **Display Interface**
VGA integrated in Intel® 852GM
18-bit dual channel LVDS
- ◆ **SSD**
CF Type II
- ◆ **Watchdog Timer**
Software programmable supports 1~255 sec. System reset
- ◆ **Power Supply**
AT/ATX support
- ◆ **Power Consumption**
5V@3.5A, 12V@1.9A,
(Intel® Pentium® M 1.7G/ 2M DDR266/ 512 MB RAM)
- ◆ **Temperature**
operation: 0°C ~ 60°C (32° F ~ 140° F)
- ◆ **Humidity**
operation: 5% ~ 95% non-condensing
- ◆ **Dimensions**
185mm x 127.6 mm
- ◆ **Weight**
GW: 1.0Kg

Features

1. Support Intel® Pentium® M / Celeron® M with 400MHz FSB
2. Intel® 852GM graphic integrated support dual display
3. DDR266MHz SDRAM memory support up to 1GB
4. LAN, USB2.0, Audio Integrated

Packing List

1 x PCISA-6770E2-RS single board computer
1 x Mini jumper pack
1 x ATA66/100 HDD cable (P/N: 32200-000052-RS)
1 x RS232/LPT cable (P/N: 19800-000027-RS)
1 x RS-232/422/485 cable (P/N: 32200-000077-RS)
1 x Audio cable (P/N: 19800-000044-RS)
1 x KB/MS Y cable (P/N: 32000-000138-RS)
1 x USB cable (P/N: CB-USB02A-RS)
1 x Utility CD
1 x QIG

Ordering Information

Part No.	Description
PCISA-6770E2-RS-R20	PCISA Intel® Pentium® M/ Celeron® M CPU Card with VGA/LVDS/TTL, Dual LAN, USB2.0 and Audio
PCISA-6770E2-RS-600-R20	PCISA Intel® Celeron® M 600MHz 512K Cache CPU Card with VGA/LVDS/TTL, Dual LAN, USB2.0 and Audio
PCISA-6770E2-RS-1GZ-R20	PCISA Intel® Celeron® M 1GHz Zero Cache CPU Card with VGA/LVDS/TTL, Dual LAN, USB2.0 and Audio
32200-000058-RS	2.0 Pitch FDD cable
32100-133600-RS	2.0mm to 2.54mm pitch Front Panel cable
32100-126600-RS	2.0mm to 2.54mm pitch Front USB cable
CF-479B-RS	CPU cooler