


ECA-200

Industrial Chassis

New

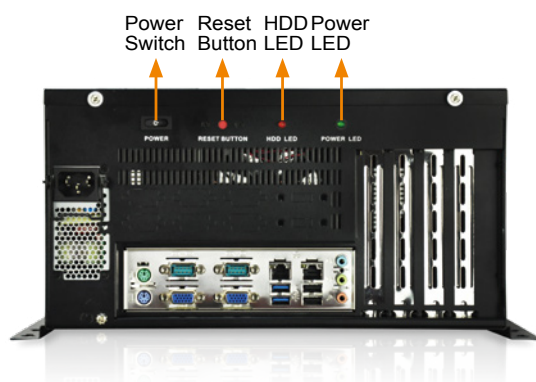


Features

- RoHS compliant design
- Supports microATX motherboard
- One 3.5" HDD or one 2.5" HDD/SSD bay
- Four expansion slots

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	microATX
◆ PSU	1U flex power supply
◆ Drive Bays	1 x 3.5"/2.5" HDD/SSD Expansion: 1 x 3.5"/2.5" HDD/SSD by the optional ECA-HDD-KIT-R10
◆ Cooling Fans	1
◆ I/O Openings	2 x USB 6 x COM
◆ Expansion Slots	4
◆ Indicators	1 x Power LED, 1 x HDD LED
◆ Buttons	1 x Reset button, 1 x Power switch
◆ Installation	Desktop, wall mount
◆ Operating Temperature	-10°C ~ 50°C
◆ Operation Humidity	5% ~ 95%
◆ Color	Black
◆ Dimensions (DxWxH)	310 mm x 310 mm x 162 mm
◆ Operating Vibration	MIL-STD-810F 514.5C-1
◆ Operating Shock	Half-sine wave 3G, 11ms, 100 shocks per axis
◆ Weight (Net/Gross)	TBD

Dimensions (Unit: mm)

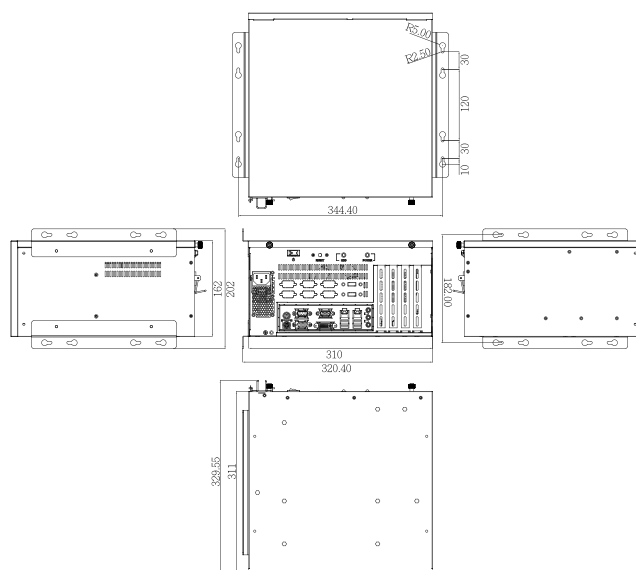

Compatible SBC

Model No.	SBC Type	PCI	PCIe			
			x1	x4	x8	x16
IMB-Q870-i2-R10	microATX	1	1	1	0	1
IMB-H810-i2-R11	microATX	2	1	0	0	1
IMB-Q770-R10	microATX	1	1	1	0	1
IMB-H810-i2-R10	microATX	2	1	0	0	1
IMB-H610A-R10	microATX	0	3	0	0	1
IMB-H110-R10	microATX	2	1	0	0	1

Ordering Information


Part No.	Description
ECA-200-R20	Desktop/wall-mount industrial chassis, supports microATX motherboard and 1U ATX power supply, black, RoHS
ECA-HDD-KIT-R10	Additional 2.5"/3.5" HDD kit for ECA-100/ECA-200, R10

Power Supply Options

Type	Model No.	Watt
ATX	ACE-A615A-RS-R11	150W
	ACE-A618B-RS-R10	180W
	ACE-A622A-RS-R11	220W
	ACE-A627A-RS-R11	270W
	ACE-A630B-RS-R10	300W

ECA-100

Industrial Chassis

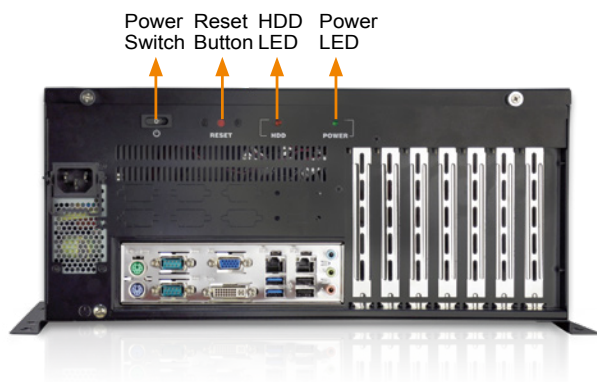New


Features

- RoHS compliant design
- Supports ATX/microATX motherboard
- One 3.5" HDD or one 2.5" HDD/SSD bay
- Seven expansion slots

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	ATX/microATX
◆ PSU	1U flex power supply
◆ Drive Bays	1 x 3.5"/2.5" HDD/SSD Expansion: 1 x 3.5"/2.5" HDD/SSD by the optional ECA-HDD-KIT-R10
◆ Cooling Fans	1
◆ I/O Openings	2 x USB 6 x COM
◆ Expansion Slots	7
◆ Indicators	Power LED, HDD LED
◆ Buttons	Power switch, reset button
◆ Installation	Desktop, wall mount
◆ Operating Temperature	-10°C ~ 50°C
◆ Operating Humidity	5% ~ 95%
◆ Storage Temperature	-20°C ~ 60°C
◆ Color	Black
◆ Dimensions (DxWxH)	365 mm x 291 mm x 162 mm
◆ Operating Vibration	MIL-STD-810F 514.5C-1
◆ Operating Shock	Half-sine wave 3G, 11ms, 100 shocks per axis
◆ Weight (Net/Gross)	TBD

Dimensions (Unit: mm)

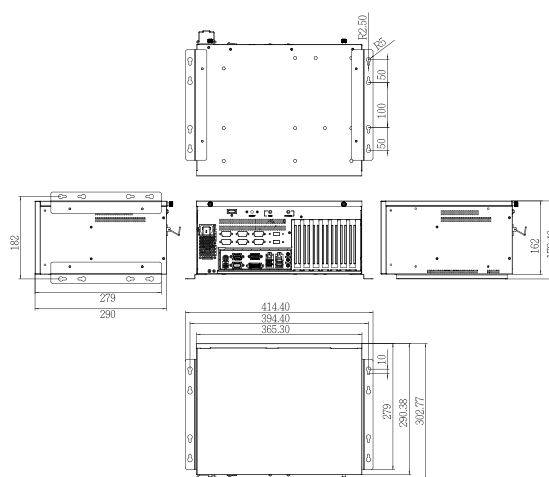

Compatible SBC

Model No.	SBC Type	PCI	PCIe			
			x1	x4	x8	x16
IMBA-Q170-i2-R10	ATX	2	0	3	2	0
IMBA-H110-R10	ATX	6	0	0	0	1
IMBA-H810-R10	ATX	4	2	0	0	1
IMBA-Q870-i2-R10	ATX	4	1	1	0	1
IMBA-Q770-R10	ATX	3	2	1	0	1
IMBA-Q670-R30	ATX	4	1	1	0	1
IMBA-H610-R10	ATX	4	2	0	0	1
IMB-Q870-i2-R10	microATX	1	1	1	0	1
IMB-H810-i2-R11	microATX	2	1	0	0	1
IMB-Q770-R10	microATX	1	1	1	0	1
IMB-H810-i2-R10	microATX	2	1	0	0	1
IMB-H610A-R10	microATX	0	3	0	0	1

Ordering Information


Part No.	Description
ECA-100-R20	Desktop/wall-mount industrial chassis, supports ATX/microATX motherboard and 1U ATX power supply, black, RoHS
ECA-HDD-KIT-R10	Additional 2.5"/3.5" HDD kit for ECA-100/ECA-200, R10

Power Supply Options


Type	Model No.	Watt
ATX	ACE-A615A-RS-R11	150W
	ACE-A618B-RS-R10	180W
	ACE-A622A-RS-R11	220W
	ACE-A627A-RS-R11	270W
	ACE-A630B-RS-R10	300W

PAC-1000G

6-slot Full-size Compact Chassis

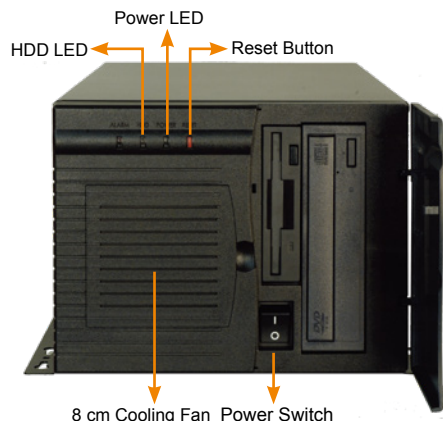

CD-ROM and HDD are not included in package

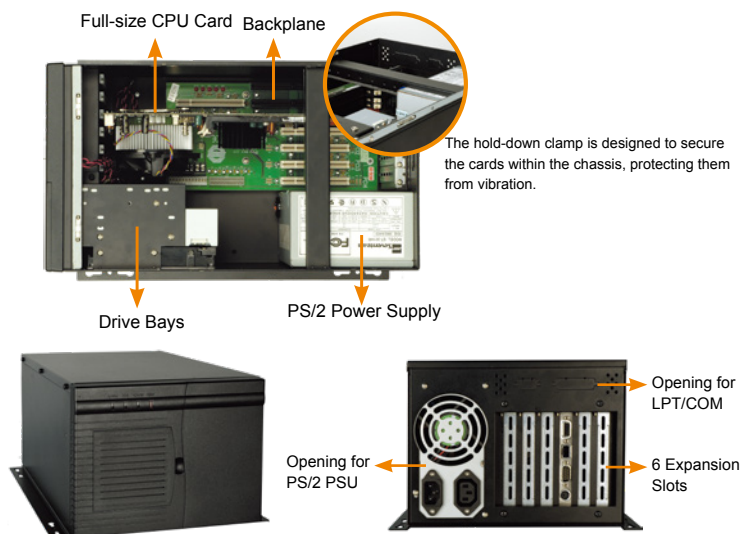


Features

- RoHS compliant design
- One, 8 cm cooling fan with replaceable fan filter
- Plastic front panel with cover door

Specifications

◆ Construction	Metal with plastic front panel
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x Front-accessible 3.5" 1 x 5.25" 1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	5.6 kg/8.8 kg
◆ Dimensions (DxWxH)	421 mm x 232 mm x 176 mm

Dimensions (Unit: mm)

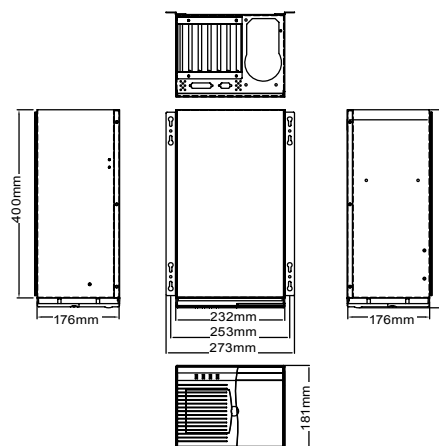

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-6S-RS	ISA	0	6	0	0	0	0	AT
IP-6S-RS	PCISA	3	2	0	0	0	0	AT
IP-6SA-RS	PCISA	3	2	0	0	0	0	ATX
PCI-6S-RS	PICMG 1.0	4	2	0	0	0	0	AT/ATX
PCI-5S-RS	PICMG 1.0	3	1	0	0	0	0	AT/ATX
PE-6S2*	PICMG 1.3	3	0	0	1	0	1	ATX
SPE-4S	PICMG 1.3	0	0	0	1	2	0	ATX
SPE-6S	PICMG 1.3	0	0	0	5	0	0	ATX

*Only R20 or later versions support PICMG 1.3 backplane

Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-T140A-RS	400W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R11	400W
	ACE-828V-RS	250W


PAC-1000G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

Ordering Information

Part No.	Description
PAC-1000GB-R20/A130B	6-slot full-size compact chassis, white, 1 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS

PAC-106G

6-slot Full-size Compact Chassis

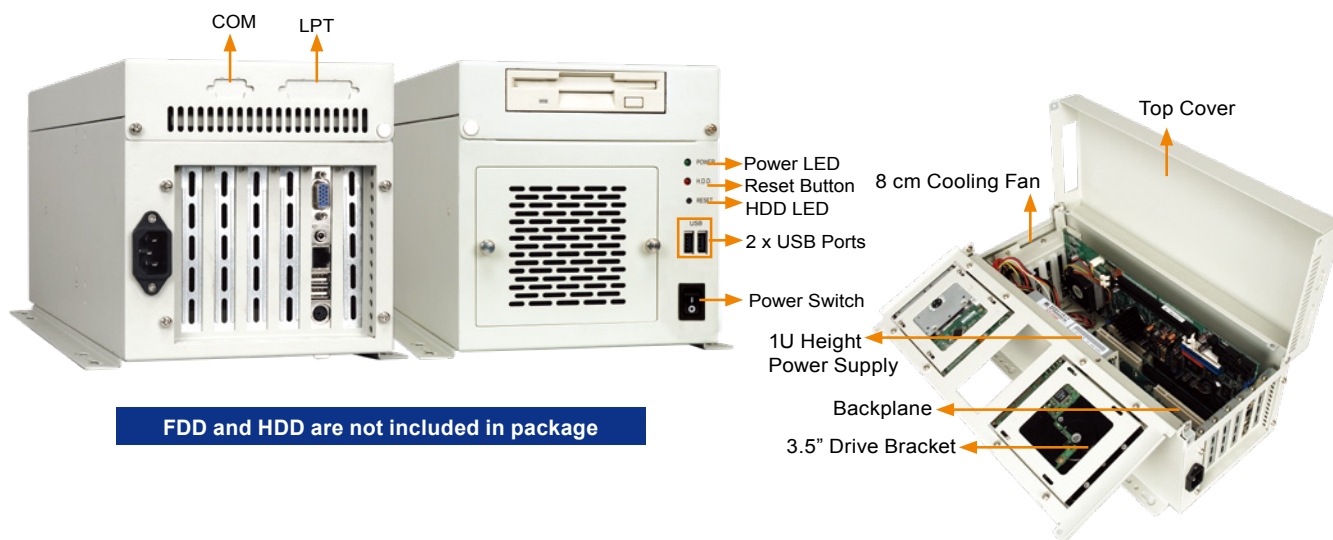


Features

- RoHS compliant design
- Two USB ports on the front panel
- One 3.5" drive bay and one internal 3.5" HDD bay
- One 8 cm cooling fan

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x Front-accessible 3.5"
	1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x COM, 1 x LPT
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	5.2 kg/7.8 kg
◆ Dimensions (DxWxH)	400 mm x 166 mm x 175.5 mm

Dimensions (Unit: mm)

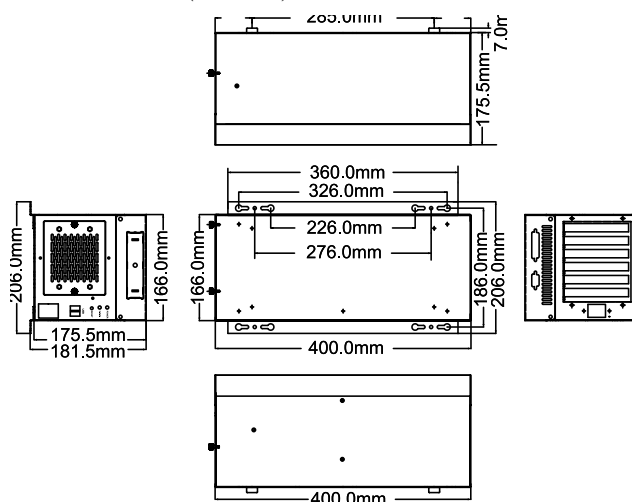

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-6S-RS	ISA	0	6	0	0	0	0	AT
IP-6S-RS	PCISA	3	2	0	0	0	0	AT
IP-6SA-RS	PCISA	3	2	0	0	0	0	ATX
PCI-6S-RS	PICMG 1.0	4	2	0	0	0	0	AT/ATX
PE-6S2*	PICMG 1.3	3	0	0	1	0	1	ATX
SPE-4S	PICMG 1.3	0	0	0	1	2	0	ATX
SPE-6S	PICMG 1.3	0	0	0	5	0	0	ATX

*Only R20 or later versions support PICMG 1.3 backplane

Power Supply Options

Type	Model No.	Watt
ATX	ACE-A618B-RS-R10	180W


PAC-106G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

Ordering Information


Part No.	Description
PAC-106GW-R21/A618B	6-slot full-size compact chassis, white, 1 x 8 cm fan, with ACE-A618B-RS-R10 (180W ATX model), RoHS

PAC-1700G

7-slot Full-size Compact Chassis

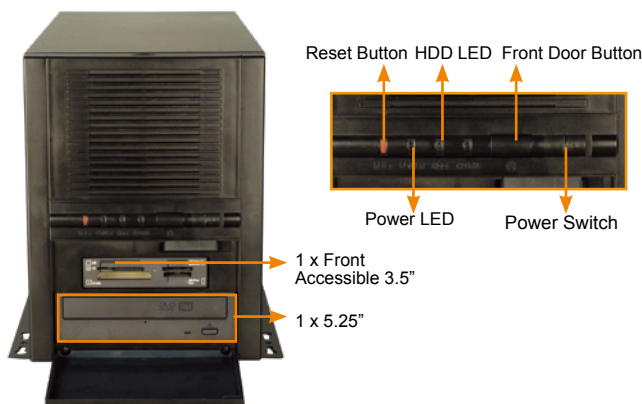

CD-ROM and HDD are not included in package.

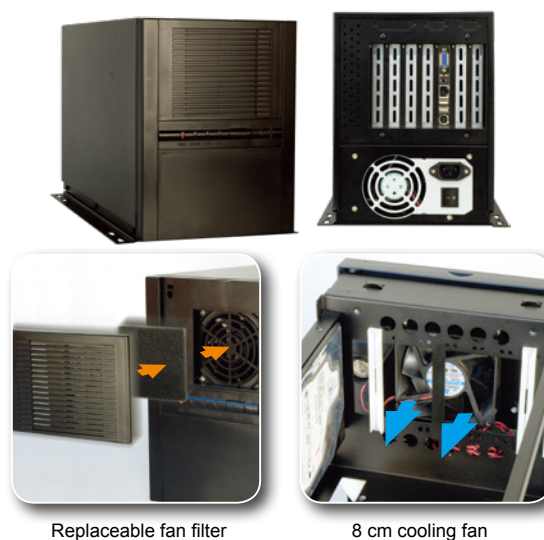

Replaceable fan filter

8 cm cooling fan


Features

- RoHS compliant design
- One 5.25" and one 3.5" drive bay
- Two 3.5" internal HDD bays
- Seven expansion slots, compatible with full-size SBC
- 7 expansion slots, compatible with full-size SBC

Specifications

◆ Construction	Metal with plastic front panel
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x front-accessible 3.5"
	1 x 5.25"
	2 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Openings	1 x LPT, 2 x COM
◆ Expansion Slots	7 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	6 kg/8.4 kg
◆ Dimensions (DxWxH)	433 mm x 233 mm x 253.7 mm

Dimensions (Unit: mm)

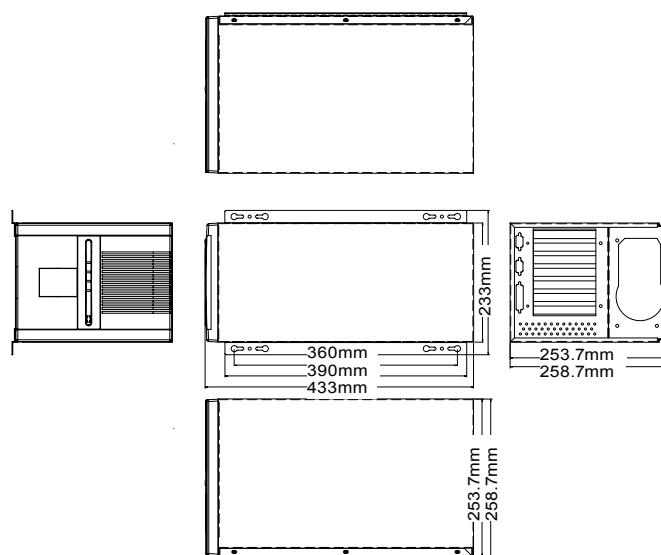

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
PCI-7S-RS	PICMG 1.0	4	3	0	0	0	0	AT/ATX
PE-7S*	PICMG 1.3	3	0	2	0	0	1	ATX
PE-7S2*	PICMG 1.3	1	0	4	0	0	1	ATX
HPXE2-7S1	HPCIE	3	0	0	0	2	0	ATX

*Only R20 or later versions support PICMG 1.3 backplane

Ordering Information


Part No.	Description
PAC-1700GB-R20/A130B	7-slot full-size compact chassis, black, 1 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS

Power Supply Options

Type	Model No.	Watt
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R11	400W

PAC-1700G supports single PS/2 PSU. For more IIE PSU models, please refer to section 5 or visit www.ieiworld.com.

PAC-125G 10-slot Full-size Compact Chassis

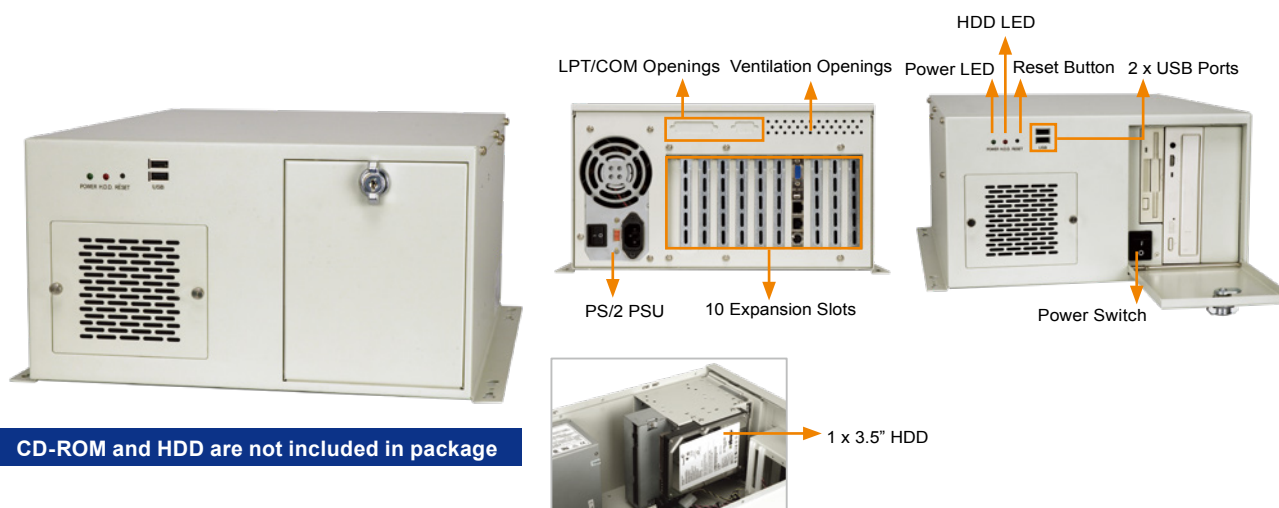


Features

- RoHS compliant design
- Two USB ports on the front panel
- One 80mm x 80mm x 25mm hot swappable cooling fan with fan filter
- 2 x 5.25", 1 x 3.5" HDD, 1 x front-accessible 3.5" drive bays
- Lockable door prevents unauthorized access

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	2 x 5.25"
	1 x Front accessible 3.5"
	1 x 3.5" HDD
◆ Cooling Fans	80mm x 80mm x 25mm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	10 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	7.2 kg/10.4 kg
◆ Dimensions (DxWxH)	420 mm x 321 mm x 176 mm

Dimensions (Unit: mm)

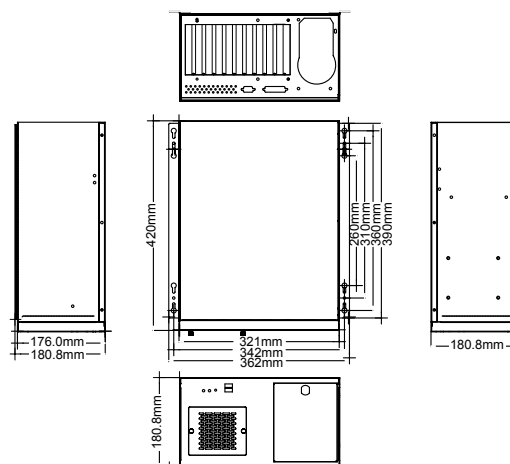

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIX	PCIe				PSU Connector
					x1	x4	x8	x16	
BP-10S-RS	ISA	0	10	0	0	0	0	0	AT
PCI-10S-RS	PICMG 1.0	4	5	0	0	0	0	0	AT/ATX
PX-10S-RS	PICMG 1.0	7	3	0	0	0	0	0	AT/ATX
IP-10S-RS	PCISA	4	5	0	0	0	0	0	AT/ATX
IPX-9S-RS	PCISA	8	0	0	0	0	0	0	AT/ATX
HPE-8S	PCI/PIC0e	4	0	0	2	0	0	0	ATX
PE-6S	PICMG 1.3	2	0	0	2	0	0	1	ATX
PE-8S*	PICMG 1.3	3	0	0	3	0	0	1	ATX
SPE-9S	PICMG 1.3	3	0	0	0	3	1	0	ATX

*Only R20 or later versions support PICMG 1.3 backplane

Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-935AL-RS	300W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R11	400W
	ACE-A160A-R11	600W


PAC-125G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

Ordering Information

Part No.	Description
PAC-125GW-R22/A130B	10-slot full-size compact chassis, white, 1 x 8cm fan, with ACE-A130B-R10 (300W ATX model), RoHS
PAC-125GW-R22/ACE-925AP	10-slot full-size chassis, white, with ACE-925AP PSU (200W), RoHS

PAC-53GH

3-slot Half-size Compact Chassis

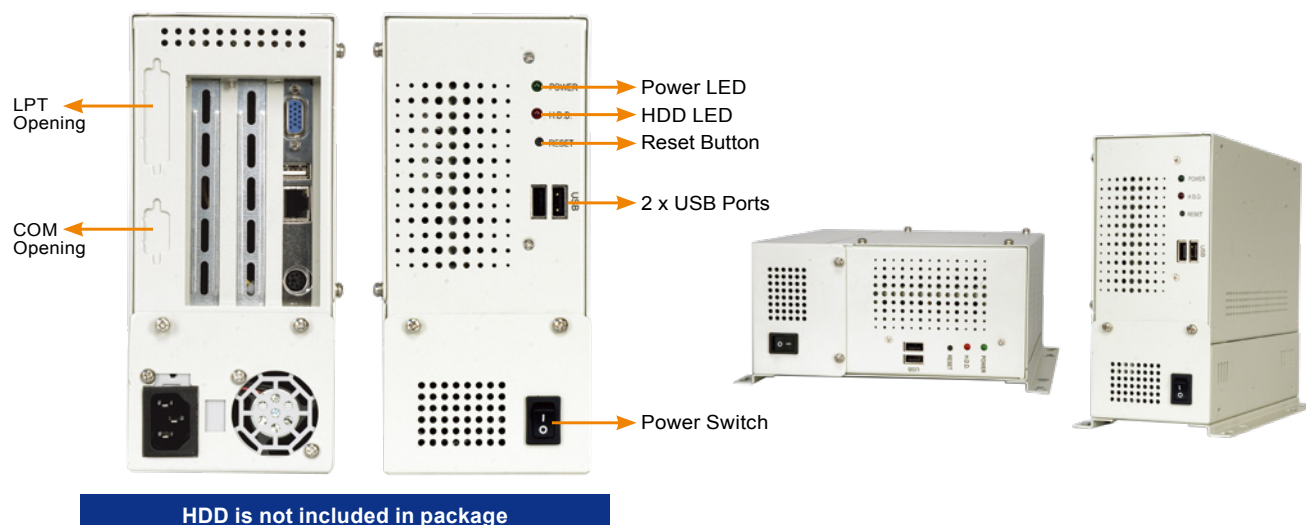


Features

- RoHS compliant design
- Two USB ports on the front panel
- One 2.5" internal HDD bay

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU cards
◆ Drive Bays	1 x 2.5" HDD
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	3 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	2 kg/3.8 kg
◆ Dimensions (DxWxH)	218 mm x 95 mm x 200 mm

Dimensions (Unit: mm)

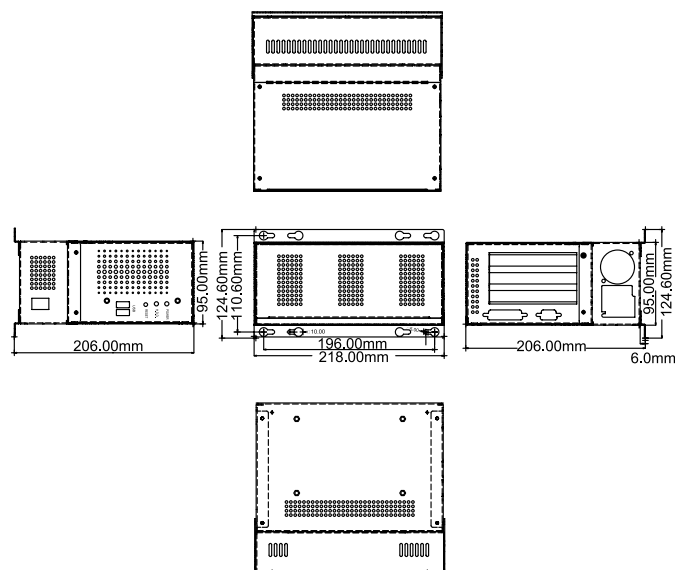

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-3S-RS	ISA	0	3	0	0	0	AT
IP-3S-RS	PCISA	2	0	0	0	0	AT

Power Supply Options

Type	Model No.	Watt
ATX	ACE-A618B-RS-R10	180W
	ACE-4520C-RS	200W


PAC-53GH supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

Ordering Information

Part No.	Description
PAC-53GHW-R11/A618B	3-slot half-size compact chassis, white, with ACE-A618B-RS-R10 (180W ATX model), RoHS

PAC-42GH

4-slot Half-size Compact Chassis

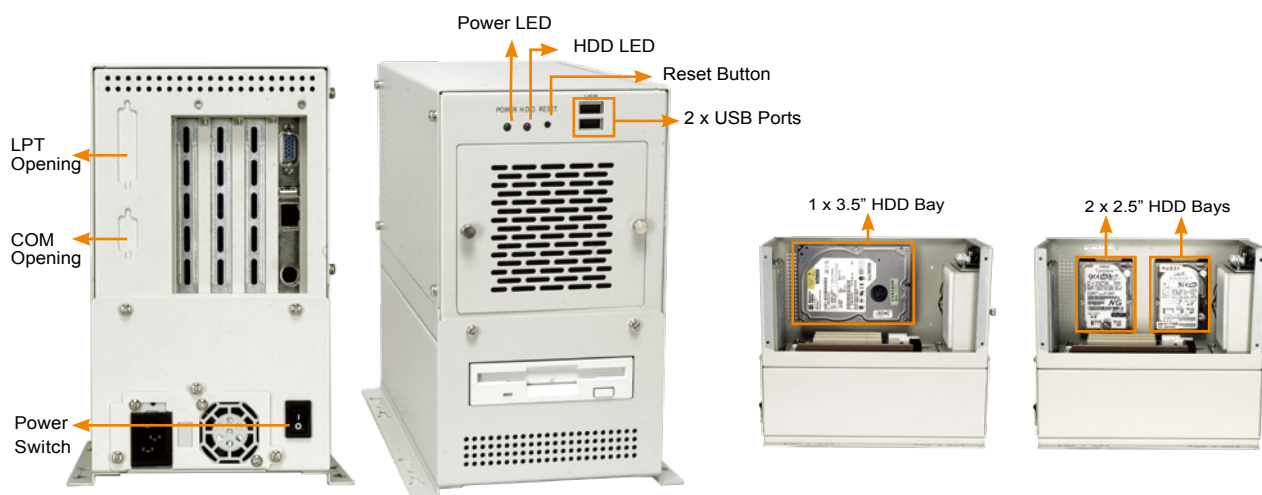

FDD and HDD are not included in package


Features

- Two USB ports on the front panel
- One 8 cm cooling fan with replaceable filter
- Supports one 3.5" HDD or two 2.5" HDDs

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU cards
◆ Drive Combinations	1 x Front-accessible 3.5" and 1 x 3.5" HDD or 1 x Front-accessible 3.5" and 2 x 2.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	4 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	3.9 kg/6.1 kg
◆ Dimensions (DxWxH)	269 mm x 140 mm x 230 mm

Dimensions (Unit: mm)

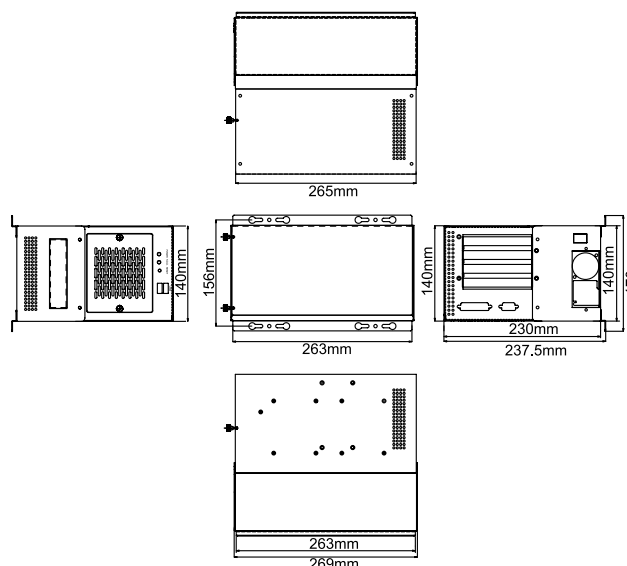

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-4S-RS	ISA	0	4	0	0	0	AT
IP-4S-RS	PCISA	3	0	0	0	0	AT
IP-4S2-RS	PCISA	2	1	0	0	0	AT
HPE-4S1	PCI/PICoE	3	0	0	0	0	ATX
HPE-4S2	PCI/PICoE	2	0	0	1	0	ATX

Ordering Information

Part No.	Description
PAC-42GHWPX-R11/A618B	4-slot half-size compact chassis, white, 1 x 8 cm fan, with ACE-A618B-RS-R10 (180W ATX model), RoHS


Power Supply Options

Type	Model No.	Watt
ATX	ACE-A618B-RS-R10	180W

PAC-42GH supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

PR-1500G

5-slot Half-size Compact Chassis

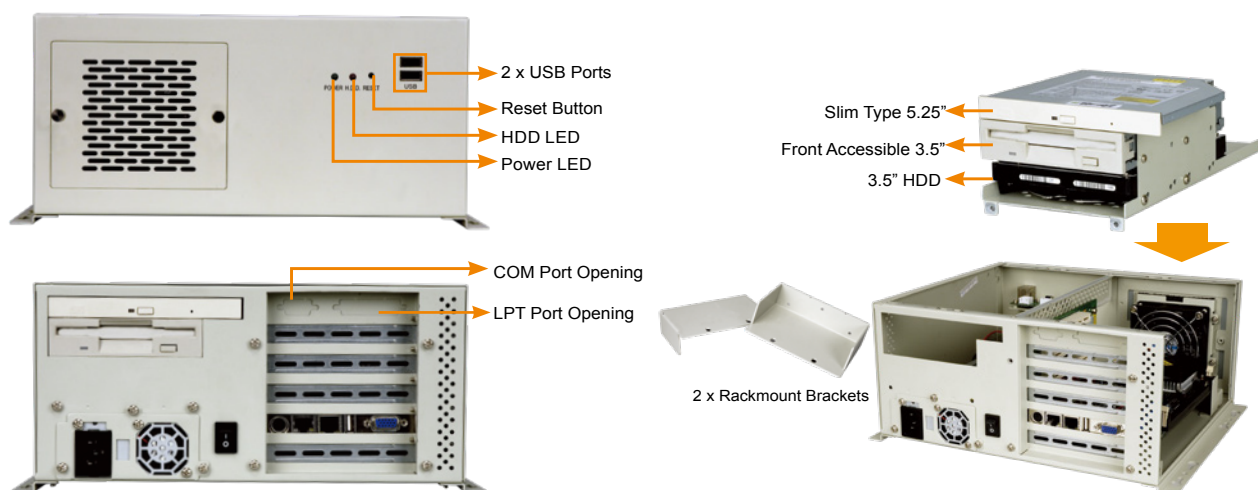

CD-ROM and HDD are not included in package.


Features

- RoHS compliant design
- One slim type 5.25" drive bay
- One 3.5" drive bay and one internal 3.5" HDD bay
- Two USB ports on the front panel
- One 8 cm cooling fan

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" HDD 1 x Front accessible 3.5" 1 x Slim 5.25"
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	5 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	3.6 kg/6.2 kg
◆ Dimensions (DxWxH)	254 mm x 286 mm x 132 mm

Dimensions (Unit: mm)

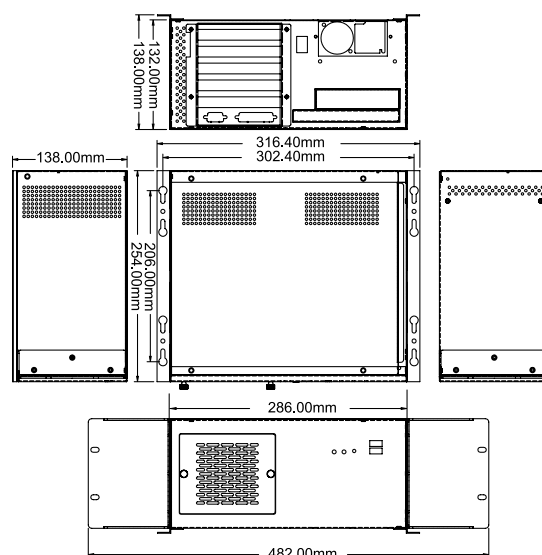

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-5S-RS	ISA	0	5	0	0	0	AT
IP-5SA2-RS	PCISA	4	1	0	0	0	ATX
HPE-5S1	PICO/PICoE	4	0	0	0	0	ATX
HPE-5S2	PICO/PICoE	3	0	0	1	0	ATX
HPXE2-5S1	HPCIe	2	0	0	0	1	ATX

Power Supply Options

Type	Model No.	Watt
ATX	ACE-A618B-RS-R10	180W
	ACE-A225A-R11	250W


PR-1500G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

Ordering Information

Part No.	Description
PR-1500GW-R12/A618B	5-slot half-size compact chassis, white, 1 x 8 cm fan, with ACE-A618B-RS-R10 (180W ATX model), RoHS

PAC-400G

5-slot Half-size Compact Chassis

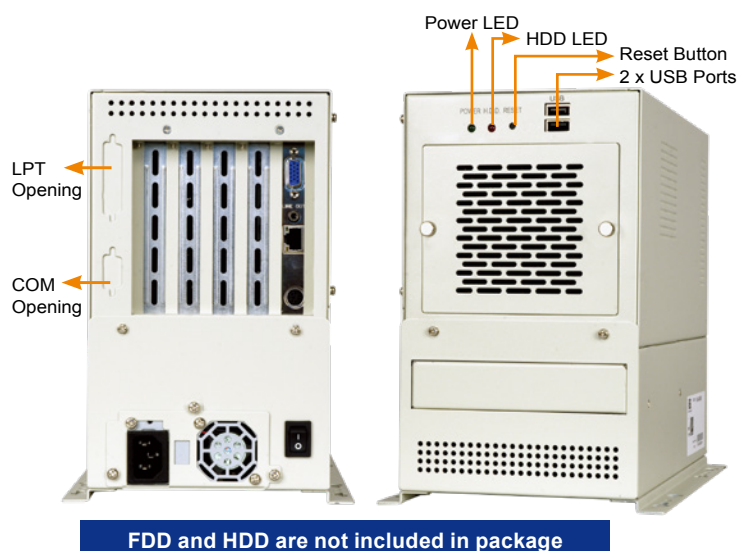

7G000-ST1110L-RS
SATA removable drive



3.5" SATA removable drive bay compatible


Features

- RoHS compliant design
- Two USB ports on the front panel
- One 8 cm hot swappable fan
- One 3.5" internal HDD bay
- One 3.5" drive bay, for optional removable drive
- Supports Pentium® 4 half-size CPU card

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	5 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	3.8 kg/5.6 kg
◆ Dimensions (DxWxH)	269 mm x 140 mm x 230.5mm

Dimensions (Unit: mm)

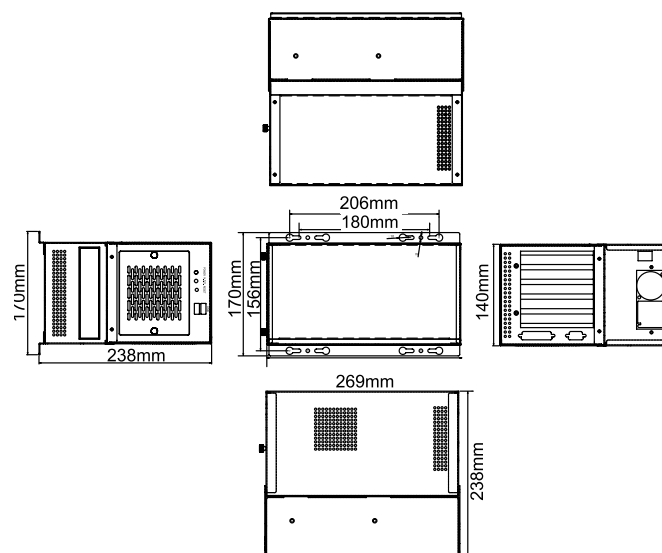

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-4S-RS	ISA	0	4	0	0	0	AT
IP-4S-RS	PCISA	3	0	0	0	0	AT
IP-4S2-RS	PCISA	2	1	0	0	0	AT
IP-4S2A-RS	PCISA	3	0	0	0	0	ATX
HPE-4S1	PCI/PICoE	3	0	0	0	0	ATX
HPE-4S2	PCI/PICoE	2	0	0	1	0	ATX

Ordering Information


Part No.	Description
PAC-400GW-R11/A618B	5-slot half-size compact chassis, white, 1 x 8 cm fan, with ACE-A618B-RS-R10 (180W ATX model), RoHS
7G000-ST1110L-RS	3.5" SATA removable drive bay with keylock, white, RoHS

Power Supply Options

Type	Model No.	Watt
ATX	ACE-A618B-RS-R10	180W

PAC-400G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

PAC-700G 7-slot Half-size Compact Chassis

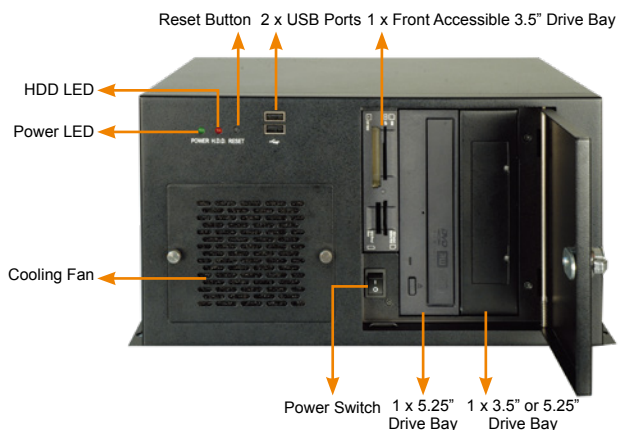

CD-ROM, and HDD are not included in package.



Easy hot-swappable fan



Step 1: Loosen the thumb screws
Step 2: Pull the fan out gently
Step 3: Unplug the power connector


Features

- RoHS compliant design
- Two USB ports on the front panel
- One, 8 cm cooling fan with fan filter
- Easy access design for quick fan replacement
- Lockable door prevents unauthorized access

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU card
◆ Drive Combinations	2 x 5.25" + 1 x Front accessible 3.5" or 1 x 5.25" + 2 x Front accessible 3.5" or 1 x 5.25" + 1 x Front accessible 3.5" + 1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB on front panel
◆ I/O Openings	2 x LPT, 2 x COM
◆ Expansion Slots	7 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	6.2 kg/9 kg
◆ Dimensions (DxWxH)	279 mm x 321 mm x 176 mm

Dimensions (Unit: mm)

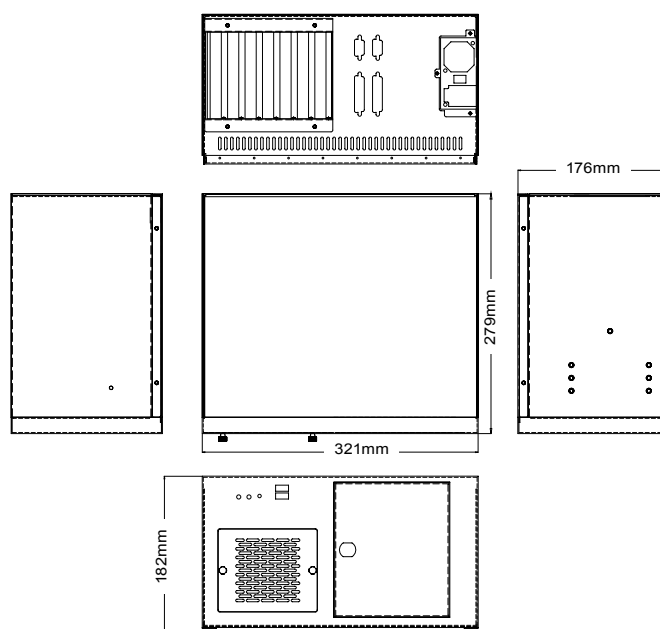

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-7S-RS	ISA	0	7	0	0	0	0	AT
HPXE2-7S1	HPCI	3	0	0	0	2	0	ATX

Power Supply Options

Type	Model No.	Watt
ATX	ACE-A618B-RS-R10	180W
	ACE-A225A-R11	250W

PAC-700G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

Ordering Information

Part No.	Description
PAC-700GB-R11/A618B	7-slot half-size compact chassis, black, 1 x 8 cm fan, with ACE-A618B-RS-R10 (180W ATX model), RoHS